

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

10/508991
Rec'd PCT/PTO 27 SEP 2004
PCT/ SE 03 / 0 0 4 6 6

REC'D 01 APR 2003

WIPO PCT

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Telefonaktiebolaget L M Ericsson (publ), Stockholm
Applicant (s) SE

(21) Patentansökningsnummer 0200953-8
Patent application number

(86) Ingivningsdatum 2002-03-27
Date of filing

RA 16 5 11 6

Stockholm, 2003-03-25

För Patent- och registreringsverket
For the Patent- and Registration Office

Lina Oljeqvist
Lina Oljeqvist

Avgift
Fee

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

A METHOD AND APPARATUS FOR EXCHANGING DATA IN A MOBILE NETWORK.

TECHNICAL FIELD

5 The present invention relates generally to a method and apparatus for exchanging potentially sensitive user-specific data from a mobile network to a service application of an external service provider. In particular, the invention is concerned with controlling and facilitating
10 the process of providing such data.

BACKGROUND OF THE INVENTION AND PRIOR ART

 Mobile phones have so far been used mostly for making voice calls and for communicating short text
15 messages, such as SMS (Short Message Service) messages. Further, Internet browsing has rapidly become very popular and in recent years, the wireless domain and the Internet are converging. Mobile terminals are now available, having functionality for connecting to the Internet over a wireless
20 access network to obtain information and services from servers located throughout the world.

 Today, work is in progress for developing a multitude of new mobile services, which will be possible to employ in particular as new technology for mobile
25 communication is introduced, providing greater network capacity and higher transmission bitrates. By way of example, GPRS (General Packet Radio Service) and WCDMA (Wideband Code Division Multiple Access) networks are currently emerging for enabling wireless data services
30 requiring a wide range of data rates. The contents of the new services may include text, images, voice, audio files and video files in various different formats and

combinations. More sophisticated mobile terminals are also becoming available on the market equipped with functions to match these new services.

In particular, mobile instant messaging and
5 presence services are rapidly becoming popular. Instant messaging is known from the world of fixed desktops, including message status reporting and various group and contact list features. Presence services involve information on the location of mobile terminals, and enable users to
10 receive messages according to their profile and availability. A user profile can be personal and may be defined by preferences, interests and hobbies, as well as more temporary factors, such as user availability and current moods. Messages and content services can also be
15 delivered depending on present location, availability and the capabilities of the user's mobile terminal.

A mobile network providing wireless access to mobile terminals typically comprises a plurality of base stations being connected together by means of switching
20 nodes such as Base Station Controllers (BSC) and/or Mobile Switching Centres (MSC). Each base station provides radio coverage over an area known as a cell, for communication over radio channels with mobile terminals located in the cell. The mobile network further comprises a multitude of
25 components or nodes for handling traffic and various services for terminals, such as, e.g., a user management node, a billing centre, a subscription management node and a mobile positioning service (MPS) node. Such mobile networks are sometimes referred to as "Public Land Mobile Networks"
30 (PLMNs).

In order to provide wireless access and specific services to users of the mobile terminals, the mobile

network stores user-specific data defining user profiles and/or subscription parameters, e.g., as exemplified above. Thereby, the mobile network can adapt and customise its services to each user, based on the stored user data.

5 Further, many services and applications are provided from so-called third party service providers outside the mobile network, which will be referred to as "external providers" for short in this description. The external providers may communicate with mobile terminals over a backbone network,
10 such as the Internet, a PSTN (Public Switched Telephony Network) or any type of wireless network, and the mobile network or PLMN to which the intended terminal is currently connected.

External providers may thus activate service
15 applications for providing specific services to mobile terminals, typically upon request from a terminal. A service application may also be triggered without a preceding terminal request, such as through a "push" mechanism as used for example in the context of WAP (Wireless Application
20 Protocol) telephony.

Examples of service applications are mail programs, chat programs, content services providing news, weather information or stock quotes, and entertainment services for jokes, games or the like. Such applications often require
25 access to certain user data stored in the mobile network, for enabling adaptation to specific users. In that case, an external provider requests that such data be retrieved and given from the mobile network. When the external provider has obtained the necessary information on the user,
30 application data can be communicated with the mobile terminal using the mobile network as a transparent "pipeline".

User data stored in a mobile network is available to, and can be freely accessed by, components and nodes within the mobile network, since these are controlled by the mobile network owning the user data. However, difficulties
5 may arise with respect to privacy when an external provider requires access to certain user data in the mobile network in order to provide a service to one or more mobile terminals. It is then highly desirable to ensure that the external provider is authorised to access the requested user
10 data before the data is delivered, and to protect sensitive user information from unauthorised access. It is also desirable to control the exchange of such data in a simple and effective way.

The Parlay 2.1 and 3.0 specifications describe a
15 proposed solution for providing a standardised interface to mobile networks for external service providers. However, the solution does not protect user privacy and is highly complex. It is thus a problem to exchange user data to external service providers in a simple way which protects
20 user privacy.

SUMMARY OF THE INVENTION

The object of the present invention is to reduce or eliminate the problems outlined above. This object and
25 others are obtained by providing a method and apparatus for exchanging user-specific data from a mobile network to a service application of an external service provider, wherein certain user data is needed by the application for providing a requested service to a mobile user. A unique Application
30 User Identification (AUID) code is generated and assigned to a combination of the mobile user and the application. The assigned AUID code is then sent to the application. A

request for the needed user data is received from the application together with an AUID code. It is then determined whether the application is allowed to retrieve the requested user data. If so, the requested user data is
 5 retrieved based on the received AUID code, and is sent to the application. On the other hand, an error message may be sent if it is determined that the application is not allowed to retrieve the requested user data.

The inventive procedure may be implemented in a
 10 single data control server having means for performing the procedure. User data can then be efficiently controlled and communicated between a mobile network and service applications. The data control server may include a permission table specifying the types of user data that each
 15 service application is allowed to receive from the mobile network. The data control server may further include a translation table for storing the AUID code together with a mobile user identity and an application identity. The data control server may further include a translator for
 20 translating AUID codes into mobile user identities and vice versa by checking the translation table.

The data control server may further include code generating means being capable of generating new AUID codes by dividing the decimal representation of a non-periodic
 25 irrational number into blocks of a certain length, wherein each block may be used as an AUID code.

The inventive procedure may further be executed by means of a computer program comprising a software code being adapted to perform the method in a data control server.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail and with reference to the accompanying drawings, in which:

- 5 - Fig. 1 is a schematic view of a simplified communication scenario for exchanging user data to an external provider or application.
- Fig. 2 is a logical block diagram of an exemplary data control server.
- 10 - Fig's 3 and 4 are signalling diagrams for two exemplary communication procedures.
- Fig. 5 is a flow chart illustrating the steps executed in a method for exchanging user data according to one aspect of the invention.

15

DESCRIPTION OF PREFERRED EMBODIMENTS

A simplified communication scenario is illustrated in Fig. 1, where user data can be exchanged according to the present invention to a service application of an external provider. A mobile terminal 100 operated by a mobile user is
20 connected to a base station 102 of a mobile network 104 by means of a radio air interface. The mobile network 104 uses standardised communication protocols, such as any of those defined for GSM, TDMA, GPRS, UMTS, etc, for transmission of
25 speech and data over the air interface as well as within the network. TCP/IP is also commonly used within mobile networks.

A gateway 106 in the mobile network 104, provides connection for mobile terminals to external providers 108
30 being connected to a backbone network 110, such as the Internet. The gateway 106 may act as a service portal to mobile terminals for connection to specific external

providers. Furthermore, each external provider 108 comprises one or more service applications for executing specific services. In Fig. 1, three service applications 108A1-3 are shown as logical entities at the external provider 108A.

5 Various mobile services are available from external providers 108 by connecting to servers of the external providers, where the services reside typically as computer programs and data files. An external provider may have one or more physical server entities or a server system for
10 executing any number of service applications. A physical server entity may also be shared by plural external providers. Services may also be provided by multiple external providers. In the following description, the term "external provider" represents any combination of physical
15 server entities providing a single access point in the perspective of mobile terminals.

The mobile network 104 further comprises a user data base 112 in which user-specific data is stored for mobile users being registered in the mobile network 104. For
20 example, the stored user data may be related to more or less static factors such as capabilities of the user's mobile terminal and predefined QoS (Quality of Service) parameters, e.g., depending on a subscription, as well as preferences and interests as specified by the user. User data may also
25 be stored concerning more dynamic factors, such as current user availability and moods and the present location of the terminal. Furthermore, the user data base 112 may also hold certain user data which is stored temporarily for visiting users not belonging to the mobile network 104.

30 When an external provider shall provide a specific service to a mobile user, an application of the service may require specific user data in order to be executed. The user

data is therefore requested from the user data base 112 by the application. However, requested user data may contain information on the user which is private and/or secret and should not be exchanged to anyone requesting the information without control. It is thus desirable to protect the privacy or anonymity of users. The present invention provides a simple and reliable solution for obtaining such control of data exchange.

For this purpose, the mobile network 104 comprises a data control server 114 acting as an interface towards the external providers 108 and their applications, for handling requests for specific user data in the mobile network 104. The data control server 114 controls the exchange of user data and is preferably the only point of contact for making such requests by the external providers 108.

An exemplary procedure for exchanging user data will now be described with reference to Fig. 1. When a user of the mobile terminal 100 wants to make use of one or more mobile services, a suitable command is entered into the mobile terminal 100 by the user. In response to the entered command, the mobile terminal 100 sends a service request to the gateway 106, which acts as a portal for obtaining the service. The gateway 106 then forwards the service request to the data control server 114 which recognises in this case that the user has not accessed this particular service before.

The data control server 114 then generates a unique Application User Identification (AUID) code representing the combination of a specific user and a specific service application corresponding to the requested service. The AUID code is stored together with a mobile user identity such as an MSISDN (Mobile Subscriber ISDN number) used in GSM

networks, and an application identity such as a name. In practice, an identity code of either a user subscription or a physical terminal may be used as the mobile user identity.

Thus, a list of AUID codes for different service applications may be stored in the mobile network 104 for each user. Next, the data control server 114 sends the service request and the generated AUID code over the backbone network 110 to a service application 108A1 corresponding to the requested service.

After receiving the service request, the service application 108A1 may recognise that certain user-specific data is needed for providing the requested service. For example, such user data may be needed for adapting the service according to user preferences and/or terminal capabilities. In that case, the service application 108A1 sends a request for the needed user data to the data control server 114 of the mobile network 104. The received AUID code is also included in the data request.

The data control server 114 then determines whether this particular application 108A1 is authorised to receive the requested user data, which will be described in more detail later, and may retrieve the data from the user data base 112 and send it to the application accordingly. Alternatively, the service application 108A1 may not need any user data from the user data base 112 for the first service request from the mobile user. The service can then be executed without requesting user data from the mobile network 104.

The AUID code has now been stored in the mobile network 104 and is also known to the corresponding service application 108A1 as being stored locally by the application 108A1 together with any available user data. Hence, the AUID

code can be used hereafter upon any subsequent access of the user to the same service. In other words, the data control server 114 may pass the AUID code with a new service request from the user on a later occasion to the service application 5 108A1, which then can attribute the previously received user data to the service, if it was locally stored.

The service application 108A1 can also send a request to the data control server 114 for further user data including the AUID code, such as "where is the user 10 currently located having AUID xxx?". The data control server 114 can then obtain the corresponding mobile user identity from the stored AUID code list for retrieving the requested information from the user database 112. The server 114 may then decide whether to grant this request or not, depending 15 on whether the application is authorised to receive the requested type of data, and further depending on, e.g., stored user preferences.

Fig. 2 is a logical block diagram of an embodiment of the data control server 114 shown in Fig. 1. The data 20 control server 114 comprises a mobile network interface 200 for communication with the mobile network 104, and an external provider interface 202 for communication with service applications in external providers 108, such as the service application 108A1. A central logic unit 204 is 25 connected to the interfaces 200, 202 for executing the process described below. The logic unit 204 is further connected to an AUID code generator 206, a translator 208 and a permission table 210. The translator 208 includes a translation table 212.

30 The mobile network interface 200 is configured to receive service requests from mobile users and may retrieve user data from the user data base 112, e.g. using a

communication protocol normally used in the mobile network 104. The external provider interface 202 is configured to receive requests for user data from service applications and may respond with either the requested data or an appropriate error message.

The AUID code generator 206 is configured to generate new unique AUID codes using one or more suitable algorithms, ensuring that a new code has not been used before. It is also important that the generated codes cannot be derived and reproduced by any unauthorised party. A code should therefore be sufficiently long and not have any regular pattern. For example, algorithms may be used which are previously known in pseudo-random number generators offered in most programming languages, such as Java and C++.

It is then common programming practice to use current time as seed for the generator to avoid any regularity.

It is also possible to generate new AUID codes by using a non-obvious irrational number, such as the square root of 57,20938763 or the like, for which the decimal representation is non-periodic. The decimal representation can be divided into blocks of a certain length, such as 50 digits. Each block is then most likely unique and may be used as an AUID code.

The translator 208 containing the translation table 212 is configured to translate AUID codes into mobile user identities and vice versa. The table 212 comprises a list of AUID codes for different user/application combinations, where the users are preferably specified by corresponding identities as being valid in the mobile network 104. An exemplary translation table 212 is shown below:

| AUID | Mobile user ID | Application |
|------|----------------|-------------|
| XXX | +46 111 222 | A1 |
| YYY | +46 111 222 | A2 |
| ZZZ | +46 333 444 | A1 |
| VVV | +46 333 444 | A2 |

It should be noted that each user may have several AUID codes, one for each application it has accessed.

The permission table 210 specifies the types of user data that each service application is allowed to receive from the mobile network. This table is checked before granting a user data request from an application. An exemplary permission table 210 is shown below:

| Application | Allowed user data |
|-------------|---|
| A1 | Current location. |
| A2 | Current location, prepaid account status. |
| A3 | Prepaid account status. |
| A4 | Current location, current mood. |

10

A permission table 210 may be maintained for a specific user or group of users, or may be valid for all subscribers belonging to the mobile network 104. The table content may further have been negotiated with the external provider controlling each application. There may also be a minimum set of permissions that is automatically allowed to all service applications, such as for mobile terminal capabilities and subscription-based QoS parameters.

Fig's 3 and 4 illustrate signalling diagrams for exemplary communication procedures using the present invention. These will now be described with further reference to Fig. 2. It should be noted that some or all

20

messages to and from the data control server 114 may in practice be transmitted over a service portal or the like of the mobile network 104, such as the gateway 106 in Fig. 1.

In Fig. 3, a mobile terminal 100 accesses a
5 service application 108A1 for the first time. In a first step 300, the terminal 100 sends a service request SR to the mobile network which is forwarded to the data control server 114 and received in the mobile network interface 200 residing therein. The logic unit 204 identifies the mobile
10 user and the application 108A1 corresponding to the received service request. It is then recognised by the translator 208 that no AUID exists for this particular user/application combination, by checking the translation table 212. The AUID code generator 206 is then ordered to generate a new AUID
15 code, which is assigned to this user/application combination and stored in the translation table 212.

Next in a step 302, the service request is sent with the AUID code to the application 108A1. The application 108A1 then determines in this case that specific user data
20 is needed to provide the requested service, and therefore sends a user data request UDR and the AUID code to the data control server 114 in a step 304, which are received in the external provider interface 202 of the server 114. It is then checked in the permission table 210 whether the
25 application 108A1 is allowed to receive the requested user data. If so, the requested user data is retrieved from the user database 112 and the user data UD is sent to the application 108A1 in a step 306. If the application 108A1 is not allowed to receive the requested user data, or if the
30 application 108A1 is not registered at all, an appropriate error message E may be sent in an alternative step 308, or no response is sent at all. Finally, if the application

108A1 has received the user data, it can execute the requested service as indicated in a step 310, e.g. by sending payload data to the mobile terminal 100.

In Fig. 4, a mobile terminal 100 accesses the service application 108A1 again at a later occasion by sending a new service request SR in a first step 400, which is received in the data control server 114. The logic unit 204 then identifies the mobile user and the application 108A1 as in the example above, and the previously assigned AUID code is retrieved from the translation table 212 by the translator 208. In a next step 402, the service request SR and the AUID code are sent to the application 108A1. It is then possible for the application 108A1 to attribute the previously received user data to the service, if it has been locally stored. If no further user data is needed, the application 108A1 can execute the requested service as indicated in a step 404. If more data is needed, such as a current location or a prepaid account status, the steps 304-310 in Fig. 3 may be executed again, as described above.

The processes of retrieving needed user data and delivering a requested service are thereby simplified and can be controlled by the mobile network for ensuring user privacy.

Fig. 5 is a flow chart illustrating the procedure executed in the data control server 114 when a user data request is received from a service application of an external provider. The user data request is received together with an AUID code in a first step 500, corresponding to step 304 in Fig. 3. An authentication routine may optionally be performed in connection with step 500. Next in a step 502, it is determined whether the application is allowed to retrieve the requested user data,

by checking the permission table 210. If not, an error message is sent to the application in a step 504, or alternatively, no response is given at all. If the request is granted, the received AUID code is translated into a mobile user identity in a step 506, by checking the translation table 212.

Next, it is determined in a step 508 whether a valid mobile user identity was found in step 506 in order to check if the application is authorised. This check provides additional security since only an authorised application can know a valid AUID code. If not found, an error message is sent to the application in a step 510. Otherwise, the requested user data is retrieved from the user database 112 and is sent to the application in a final step 512.

By using the described invention, a simple and reliable procedure is obtained for exchanging user data to service applications of external providers, enabling efficient control and communication between a mobile network and the applications. Access to user data is controlled by a single component, the data control server 114, which thus may act as a firewall. Hence, sensitive user information can be protected from unauthorised access.

By using the unique AUID codes in service requests according to the present invention, an unauthorised application cannot impersonate an authorised application to fraudulently obtain user data. Also, users are automatically authenticated towards the applications by the AUID codes and no exchange of usernames and passwords is necessary between users and applications. Therefore, applications designed to be accessed over the Internet can easily be adapted for access via a data control server 114 as described above.

While service applications are forced to direct user data requests to a data control server 114 for initial control, the mobile network can still be used as a "pipeline" for communicating application data when delivering the service, without further involving the data control server 114.

In practice, the invention is preferably implemented as software in the data control server 114 for executing the described processes. It should be noted that the functional units 200-212 in Fig. 2 are merely logically represented and may be implemented as software in one or more processors or the like anywhere in the server 114. In an alternative embodiment, the logic unit 204 may for example be integrated with the interfaces 200, 202. In another embodiment, the logic unit 204, the AUID code generator 206 and the translator 208 may be integrated into a single functional unit. Furthermore, the permission table 210 and the translation table 212 may be stored in a memory within or outside the data control server 114.

While the invention has been described with reference to specific exemplary embodiments, the description is only intended to illustrate the inventive concept and should not be taken as limiting the scope of the invention. Various alternatives, modifications and equivalents may be used without departing from the spirit of the invention, which is defined by the appended claims.

CLAIMS

1. A method of exchanging user-specific data from a mobile network to a service application of an external service provider, wherein certain user data is needed by the application for providing a requested service to a mobile user, **characterised by the following steps:**
 - A) generating a unique Application User Identification (AUID) code which is assigned to a combination of the mobile user and the application,
 - B) sending the assigned AUID code to the application,
 - C) receiving from the application a request for the needed user data together with an AUID code,
 - D) determining whether the application is allowed to retrieve the requested user data, and if so
 - E) retrieving the requested user data based on the received AUID code and sending the user data to the application.
2. A method according to claim 1, **characterised in** that the AUID code is generated in step A) in response to receiving a service request from a mobile user.
3. A method according to claim 1 or 2, **characterised in** that the AUID code is stored in a translation table together with a mobile user identity and an application identity.
4. A method according to claim 3, **characterised in** that the mobile user identity is obtained from the translation table based on the AUID code received in step C), for retrieving the requested user data in step E) from a user

data base in which user-specific data is stored for mobile users being registered in the mobile network.

- 5 5. A method according to any of claims 1 - 4, **characterised**
in that the AUID code is used by the application for attributing the user data sent in step E), to the service upon subsequent access of the mobile user to the same service.
- 10 6. A method according to any of claims 1 - 5, **characterised**
in that the determining step D) is performed by checking a permission table specifying the types of user data that each service application is allowed to receive from the mobile network.
- 15 7. A method according to claim 6, **characterised in that** a permission table is maintained for a specific user or group of users.
- 20 8. A method according to claim 6 or 7, **characterised in that** an error message is sent if it is determined in step D) that the application is not allowed to retrieve the requested user data.
- 25 9. A method according to any of claims 1 - 8, **characterised**
in that new AUID codes are generated by dividing the decimal representation of a non-periodic irrational number into blocks of a certain length, wherein each block is used as an AUID code.
- 30 10. A method according to any of claims 1 - 9, **characterised**
by the step of determining whether a valid mobile user

identity exists that corresponds to the AUID code received in step C) in order to check if the application is authorised.

- 5 11. A data control server for exchanging user-specific data from a mobile network to a service application of an external service provider, wherein certain user data is needed by the application for providing a requested service to a mobile user, **characterised by:**
- 10 - means for generating a unique Application User Identification (AUID) code which is assigned to a combination of the mobile user and the application,
- means for sending the assigned AUID code to the application,
- 15 - means for receiving from the application a request for the needed user data together with an AUID code,
- means for determining whether the application is allowed to retrieve the requested user data, and
- means for retrieving the requested user data based on a received AUID code and sending the user data to the
- 20 application.
12. A server according to claim 11, **characterised by a** permission table specifying the types of user data that
- 25 each service application is allowed to receive from the mobile network.
13. A server according to claim 11 or 12, **characterised by a** translation table for storing the AUID code together with
- 30 a mobile user identity and an application identity.

14.A server according to claim 13, characterised by a translator for translating AUID codes into mobile user identities and vice versa by checking the translation table.

5

15.A server according to any of claims 11 - 14, characterised in that the code generating means is capable of generating new AUID codes by dividing the decimal representation of a non-periodic irrational number into blocks of a certain length, wherein each

10

block is used as an AUID code.

16.A server according to any of claims 11 - 15, characterised by a mobile network interface for receiving service requests from mobile users, and for retrieving user data.

15

17.A server according to any of claims 11 - 16, characterised by an external provider interface for receiving requests for user data from service applications, and for responding with either the requested data or an appropriate error message.

20

18.A computer program comprising a software code being adapted to perform the method of any of claims 1 - 10 in a data control server.

25


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

ABSTRACT

A method and apparatus for exchanging user-specific data from a mobile network (104) to a service application (108A1) needing certain user data for providing
5 a requested service to a mobile user (100). A unique Application User Identification (AUID) code is generated and assigned to a combination of the mobile user and the application. The assigned AUID code is then sent to the application. A request for the needed user data is received
10 from the application together with an AUID code. It is then determined whether the application is allowed to retrieve the requested user data. If so, the requested user data is retrieved based on the received AUID code, and is sent to the application. The procedure may be implemented in a
15 single data control server (114), enabling efficient control and communication of user data between a mobile network and service applications.

(Fig. 1)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185



2/3

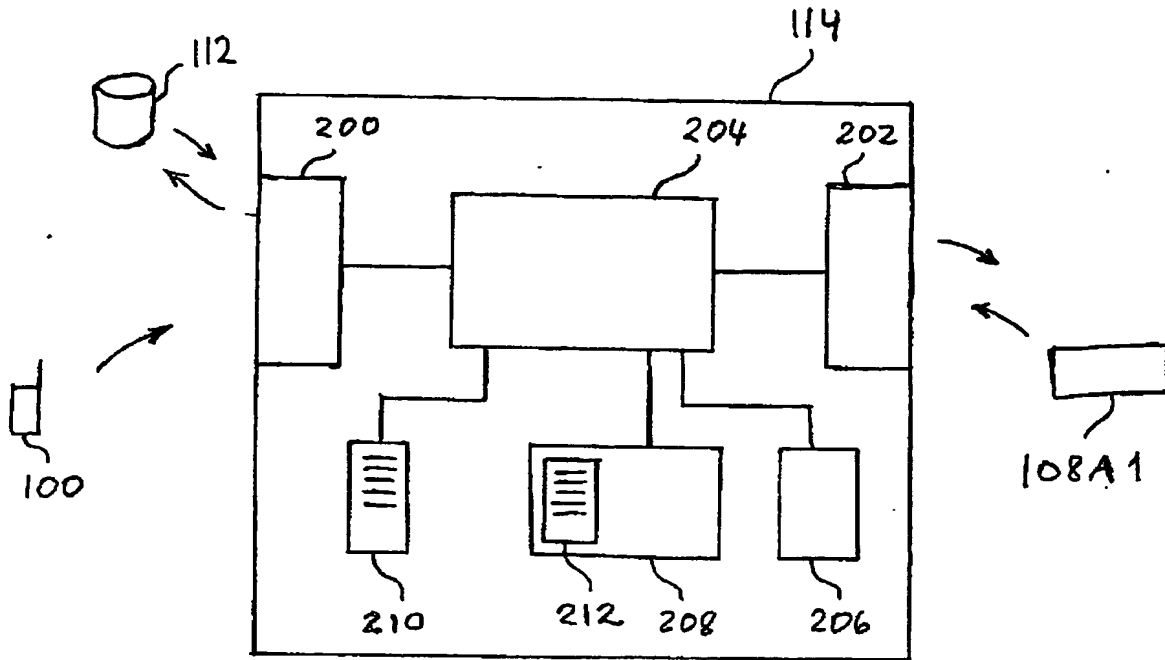


Fig. 2

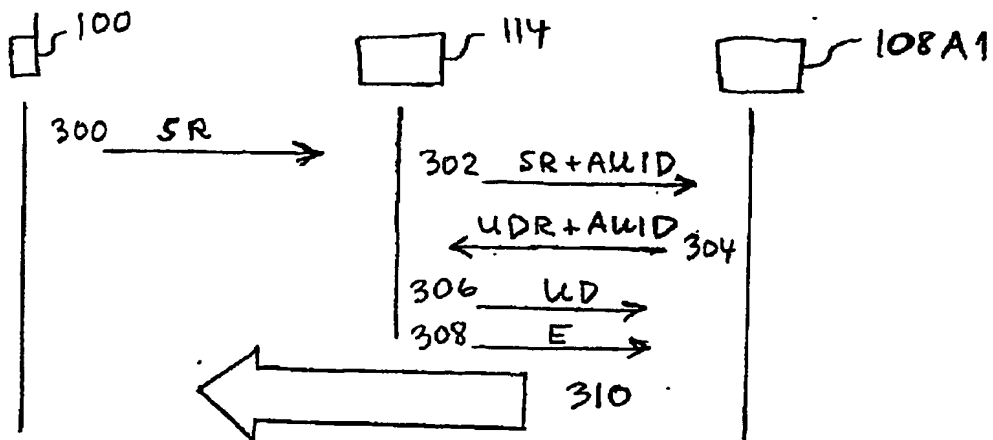


Fig. 3

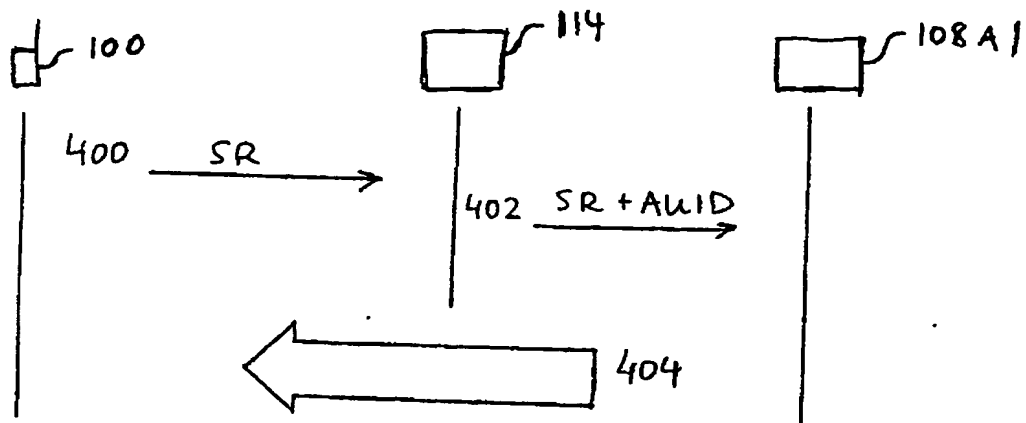


Fig. 4

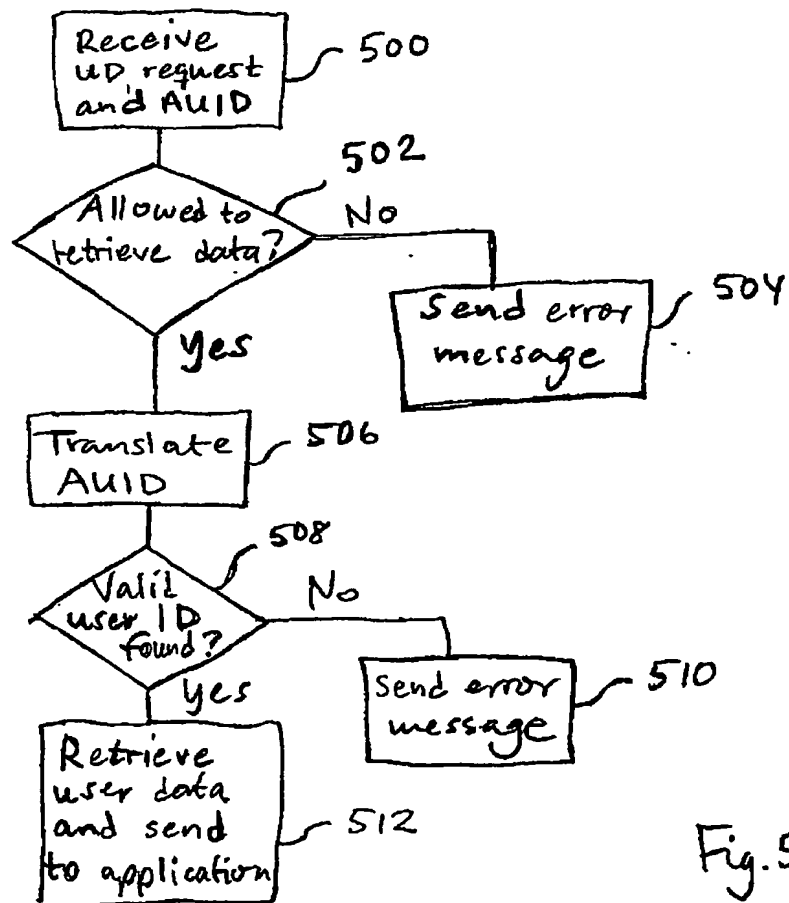


Fig. 5